

CEEVER



TANK serie - MULTI



Gli impianti Gli Impianti Ceever Serie MULTI sono macchine a vasche multiple dotate di uno o più trasportatori manuali per la movimentazione interna dei cestelli.

Il successo ottenuto da queste macchine è in gran parte dovuto alla loro versatilità d'impiego, alle grandi capacità produttive, all'affidabilità (legata alla semplicità costruttiva) e al basso impatto ambientale.

La versatilità è prima di tutto costruttiva, in quanto è possibile adattare questo tipo di impianto a molti cicli di trattamento e a diversi sistemi per il carico/scarico dei pezzi da trattare.

All'interno delle vasche di trattamento possono essere inserite attrezzature porta cestelli, buratti rotanti o buratti porta cestelli. Le scelte possono essere molteplici e possono anche essere personalizzate a seconda delle esigenze del cliente.




Ceever MULTI Plant Series are machine at multiple vats equipped with one or more manual conveyors for the inside handling of the basket.

The great success of Robot Series is due to its maximum versatility and reliability (mainly due to the constructive simplicity), to the great productive ability and the low environmental impact.

Versatility is at first constructive, it is possible to adapt these plants at many cycles of treatment and different systems of loading / unloading of the pieces to treat.

Inside of the vats treatment it is possible to insert carry basket equipment, rotating drum or carry basket drum. The choices can be manifold and it is possible to personalize them according to the specific demands of the client.

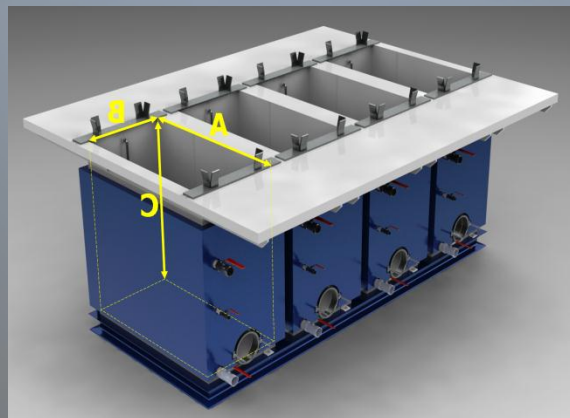

CLEANING

PICKLING

PHOSPHATING

BURNISHING

OILING

PLATING

ELECTROPOLISH

DRYING

DATA SHEET

MULTI TANK		3H1	3H2	3H3	4H1	4H2	4H3	5H1	5H2	5H3	6H1	6H2	6H3	7H1	7H2	7H3	UM
Useful dimensions of load	length	300	300	300	400	400	400	500	500	500	600	600	600	700	700	700	[mm]
	depth	300	600	900	400	800	1200	500	1000	1500	600	1200	1800	700	1400	1800	[mm]
	height	300	300	300	400	400	400	500	500	500	600	600	600	700	700	700	[mm]
Internal dimensions	length	400	400	400	500	500	500	600	600	600	700	700	700	800	800	800	[mm]
	depth	400	700	1000	500	900	1300	600	1100	1600	700	1300	1900	800	1500	1900	[mm]
	height	600	600	600	700	700	700	800	800	800	900	900	900	1000	1000	1000	[mm]
	to level	80	140	200	150	270	390	250	460	670	390	720	1050	580	1080	1400	[liters]
Heating	source	electric	electric	electric	electric	electric	electric	electric	electric	electric	electric	electric	electric	electric	electric	electric	
	type	direct	direct	direct	direct	direct	direct	direct	direct	direct	direct	direct	direct	direct	direct	direct	
	power	3	5	5	5	10	10	10	15	20	10	20	25	15	25	30	[kw]
	max. temperature	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	70-80	[°C]
Other heatings	electric indirect	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	vapor	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	gas	ND	X	X	ND	X	X	ND	X	X	ND	X	X	ND	X	X	
	gas-oil	ND	X	X	ND	X	X	ND	X	X	ND	X	X	ND	X	X	
	diathermic oil	ND	X	X	ND	X	X	ND	X	X	ND	X	X	ND	X	X	
	overheated w ater	ND	X	X	ND	X	X	ND	X	X	ND	X	X	ND	X	X	
Material of construction	Fe	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	inox aisi 304	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	inox aisi 316	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	inox aisi 316L	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	fe + pvc	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	fe + pvc - c	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	Moplen	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	SuperDuplex	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	



DATA SHEET

MULTITANK OPTION & FEATURES	3H1	3H2	3H3	4H1	4H2	4H3	5H1	5H2	5H3	6H1	6H2	6H3	7H1	7H2	7H3	UM
Programmable logic controller	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Full colour touch screen	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Touch screen - Fluid Control	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Optic signal of end cycle	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Acoustic signal of end cycle	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Modem	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Weekly clock	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Cycle counter	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Fixed equipment basket holder	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Fixed equipment pieces holder	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Rotating equipment basket holder	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Rotating equipment pieces holder	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Personalized wire base basket	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Separators of oil	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Metering device of product	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Double filtering	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Filtering in total flow rate	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Single filtering	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Metallic filter of protection	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Pump of emptying	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Pump of emptying and transfer	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
Collector of wastewater collection + pump	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

Automation

Containers

Liquid Separation and Management





CEEVER

Via Cesare Battisti 2
20090 Settala
Milan
Italy

PHONE

+39.[0]2.95.77.00.24

FAX

+39.[0]2.95.77.03.01

MAIL

sales@ceever.com

WWW.CEEVER.COM

